

Bảng thông số sản phẩm

Thông số kỹ thuật



socket, Harmony
Electromechanical Relays, for
RXM2 RXM4 relays, screw connec
to rs, mixed contact

RXZE2M114M

Main

Range of product	Harmony Electromechanical Relays Harmony Timer Relays
Device short name	RXZ
product or component type	Socket
Product compatibility	Plug-in relay RXM with 2 C/O contact Plug-in relay RXM with 4 C/O contact
Contacts type and composition	4 C/O
[Ith] conventional free air thermal current	10 A

Complementary

Shape of pin	Flat
[Ue] rated operational voltage	< 250 V conforming to IEC < 300 V conforming to UL
Contact terminal arrangement	Mixed
Connections - terminals	Connector, 1 x 0.25...1 x 2.5 mm ² (AWG 22...AWG 14) flexible with cable end Connector, 2 x 0.25...2 x 1 mm ² (AWG 22...AWG 17) flexible with cable end Connector, 1 x 0.5...1 x 2.5 mm ² (AWG 20...AWG 14) solid without cable end Connector, 2 x 0.5...2 x 1.5 mm ² (AWG 20...AWG 16) solid without cable end
Tightening torque	< 1 N.m for M3 screw(s)
Fixing mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)
[Uimp] rated impulse withstand voltage	4 kV
Overvoltage category	III
Pollution degree	3
Sale per indivisible quantity	10
Width	27 mm
net weight	0.056 kg

Environment

IP degree of protection	IP20 conforming to IEC 60529
Dielectric strength	3000 V
Standards	IEC 61984
Product certifications	UL CSA Lloyd's
marking	CE

Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	-40...55 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.686 cm
Package 1 Width	4.245 cm
Package 1 Length	7.918 cm
Package 1 Weight	0.054 kg
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	7.5 cm
Package 2 Width	8.8 cm
Package 2 Length	14.0 cm
Package 2 Weight	0.561 kg
Unit Type of Package 3	S03
Number of Units in Package 3	230
Package 3 Height	30.0 cm
Package 3 Width	30.0 cm
Package 3 Length	40.0 cm
Package 3 Weight	12.42 kg

Contractual warranty

Warranty	18 months
----------	-----------

Bền vững

Nhãn **Green Premium™** là cam kết của Schneider Electric trong việc cung cấp sản phẩm với hiệu suất môi trường tốt nhất. Green Premium cam kết tuân thủ các quy định mới nhất, minh bạch về tác động môi trường, cũng như các sản phẩm tuần hoàn và CO₂ thấp.

Hướng dẫn đánh giá tính bền vững của sản phẩm là tài liệu kỹ thuật phổ thông giúp làm rõ các tiêu chuẩn nhân sinh thái toàn cầu và cách diễn giải việc khai báo môi trường.

[Tìm hiểu thêm về Green Premium >](#)

[Hướng dẫn đánh giá về sự bền vững của sản phẩm >](#)



Minh bạch **RoHS/REACH**

Hiệu suất sức khỏe

Reach Free Of Svhc

Toxic Heavy Metal Free

Mercury Free

Rohs Exemption Information Yes

Chứng nhận & Tiêu chuẩn

Reach Regulation

[REACH Declaration](#)

Eu Rohs Directive

Pro-active compliance (Product out of EU RoHS legal scope)

[EU RoHS Declaration](#)

China Rohs Regulation

[China RoHS declaration](#)

Environmental Disclosure

[Product Environmental Profile](#)

Weee

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Circularity Profile


No need of specific recycling operations

Bảng thông số sản phẩm

RXZE2M114M

Dimensions Drawings

Dimensions

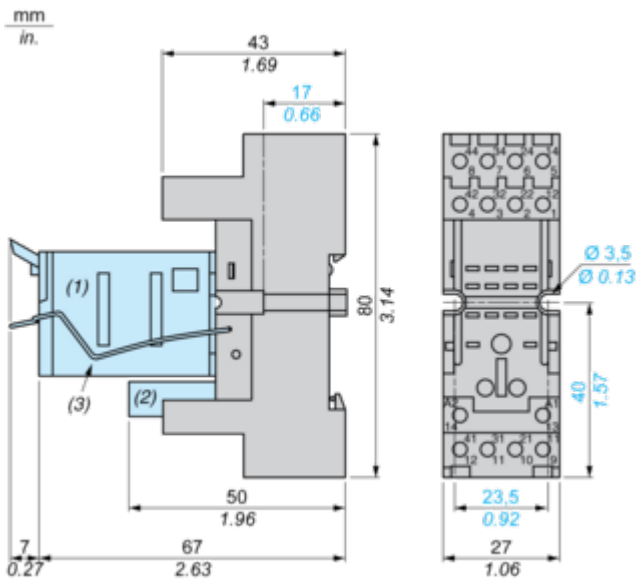

- (1) Relays
- (2) Protection module
- (3) Maintaining clamp
- (4) 2 elongated holes $\text{Ø } 3.5$ mm x 6.5 mm / $\text{Ø } 0.13$ in. x 0.25 in.

Wiring Diagram

