


Bảng thông số sản phẩm

Thông số kỹ thuật



socket, Harmony
Electromechanical Relays, for
RXM2 RXM4 relays, screw connec
to rs, separate contact

RXZE2S114M

Main

Range of product	Harmony Electromechanical Relays Harmony Timer Relays
Device short name	RXZ
product or component type	Socket
Product compatibility	Plug-in relay RXM with 4 C/O contact Plug-in relay REXL with 4 C/O contact
Contacts type and composition	4 C/O
[Ith] conventional free air thermal current	10 A

Complementary

Shape of pin	Flat
[Ue] rated operational voltage	< 250 V conforming to IEC < 300 V conforming to UL
Contact terminal arrangement	Separate
Connections - terminals	Connector, 1 x 0.25...1 x 2.5 mm ² (AWG 22...AWG 14) flexible with cable end Connector, 2 x 0.25...2 x 1 mm ² (AWG 22...AWG 17) flexible with cable end Connector, 1 x 0.5...1 x 2.5 mm ² (AWG 20...AWG 14) solid without cable end Connector, 2 x 0.5...2 x 1.5 mm ² (AWG 20...AWG 16) solid without cable end
Tightening torque	< 1 N.m for M3 screw(s)
Fixing mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)
[Uimp] rated impulse withstand voltage	4 kV
Overvoltage category	III
Pollution degree	3
Sale per indivisible quantity	10
Width	27 mm
net weight	0.07 kg

Environment

IP degree of protection	IP20 conforming to IEC 60529
Dielectric strength	2500 V
Standards	IEC 61984
Product certifications	CSA Lloyd's UL
marking	CE

Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	-40...55 °C

Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Number of Units in Package 1	1
------------------------------	---

Package 1 Height	2.679 cm
------------------	----------

Package 1 Width	2.893 cm
-----------------	----------

Package 1 Length	8.219 cm
------------------	----------

Package 1 Weight	62.2 g
------------------	--------

Unit Type of Package 2	BB1
------------------------	-----

Number of Units in Package 2	10
------------------------------	----

Package 2 Height	6.6 cm
------------------	--------

Package 2 Width	11.4 cm
-----------------	---------

Package 2 Length	13.7 cm
------------------	---------

Package 2 Weight	664.5 g
------------------	---------

Unit Type of Package 3	S03
------------------------	-----

Number of Units in Package 3	200
------------------------------	-----

Package 3 Height	30 cm
------------------	-------

Package 3 Width	30 cm
-----------------	-------

Package 3 Length	40 cm
------------------	-------

Package 3 Weight	13.2 kg
------------------	---------

Contractual warranty

Warranty	18 months
----------	-----------

Bền vững

Nhãn **Green Premium™** là cam kết của Schneider Electric trong việc cung cấp sản phẩm với hiệu suất môi trường tốt nhất. Green Premium cam kết tuân thủ các quy định mới nhất, minh bạch về tác động môi trường, cũng như các sản phẩm tuần hoàn và CO₂ thấp.

Hướng dẫn đánh giá tính bền vững của sản phẩm là tài liệu kỹ thuật phổ thông giúp làm rõ các tiêu chuẩn nhân sinh thái toàn cầu và cách diễn giải việc khai báo môi trường.

[Tìm hiểu thêm về Green Premium >](#)

[Hướng dẫn đánh giá về sự bền vững của sản phẩm >](#)



Minh bạch RoHS/REACH

Hiệu suất sức khỏe

✓ Reach Free Of Svhc

✓ Toxic Heavy Metal Free

✓ Mercury Free

✓ Rohs Exemption Information [Yes](#)

Chứng nhận & Tiêu chuẩn

Reach Regulation

[REACH Declaration](#)

Eu Rohs Directive

Pro-active compliance (Product out of EU RoHS legal scope)

[EU RoHS Declaration](#)

China Rohs Regulation

[China RoHS declaration](#)

Environmental Disclosure


[Product Environmental Profile](#)

Circularity Profile

No need of specific recycling operations

Dimensions Drawings

Dimensions

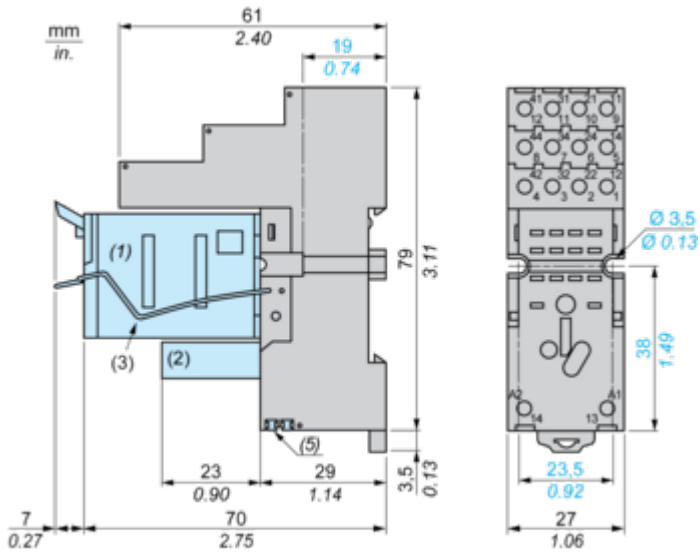

- (1) Relays
- (2) Protection module
- (3) Maintaining clamp
- (4) 2 elongated holes $\text{Ø } 3.5 \text{ mm} \times 6.5 \text{ mm} / \text{Ø } 0.13 \text{ in.} \times 0.25 \text{ in.}$
- (5) 2 bus jumpers

Wiring Diagram

