

# Product datasheet

Specifications



## 40mm Tower ROG Pole

XVC4B3

### Main

Range of product	Harmony XVC4
product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	3 illuminated units
Sound signalling	Without
Mounting diameter	40 mm
Component name	XVC
Device short name	XVC
Light source	LED steady red LED steady orange LED steady green
Supply circuit type	AC/DC

### Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94HB): top cover SGP (chromium-plated): support tube
mounting location	On support tube, 17 mm
Product mounting	On support tube, 17 mm
[Us] rated supply voltage	24 V
[Us] rated supply voltage	24 V
cable cross section	0.33 mm <sup>2</sup>
AWG gauge	AWG 22
Cable length	600 mm
marking	CE
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	75 mA
Flashing frequency	1 Hz
net weight	0.54 kg
Height	473.5 mm

### Environment

Standards	EN/IEC 61000-6-3 EN/IEC 61000-6-2
-----------	--------------------------------------

<b>Product certifications</b>	UL
<b>protective treatment</b>	TC
<b>Ambient air temperature for storage</b>	-35...70 °C
<b>Ambient air temperature for operation</b>	-10...50 °C
<b>Electrical shock protection class</b>	Class I conforming to EN/IEC 61140
<b>Overvoltage category</b>	Class I conforming to EN/IEC 61140
<b>IP degree of protection</b>	IP23 vertical surface installation conforming to EN/IEC 60529

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	6.800 cm
<b>Package 1 Width</b>	6.800 cm
<b>Package 1 Length</b>	75.200 cm
<b>Package 1 Weight</b>	758.000 g
<b>Unit Type of Package 2</b>	BB1
<b>Number of Units in Package 2</b>	10
<b>Package 2 Height</b>	17.500 cm
<b>Package 2 Width</b>	37.000 cm
<b>Package 2 Length</b>	77.500 cm
<b>Package 2 Weight</b>	8.684 kg
<b>Unit Type of Package 3</b>	P06
<b>Number of Units in Package 3</b>	20
<b>Package 3 Height</b>	75.000 cm
<b>Package 3 Width</b>	60.000 cm
<b>Package 3 Length</b>	80.000 cm
<b>Package 3 Weight</b>	25.368 kg

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency

## Well-being performance

✓ Mercury Free

✓ Rohs Exemption Information [Yes](#)

**Eu Rohs Directive** [Pro-active compliance \(Product out of EU RoHS legal scope\)](#)

**China Rohs Regulation** [China RoHS declaration](#)

**Environmental Disclosure** [Product Environmental Profile](#)


**Circularity Profile** [End of Life Information](#)

Dimensions Drawings

Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

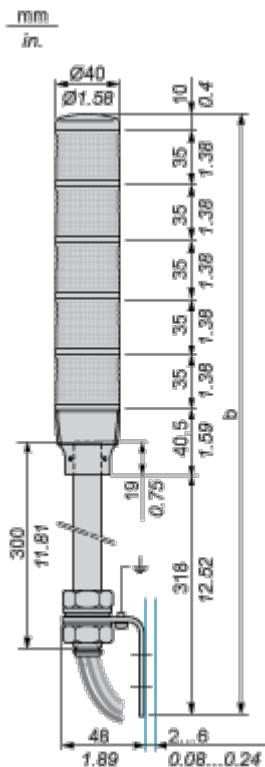

No. of illuminated units	b Without buzzer (mm)	b Without buzzer (in.)
1 stage	403.50	15.89
2 stages	438.50	17.26
3 stages	473.50	18.64
4 stages	508.50	20.02
5 stages	543.50	21.40

Mounting and Clearance

Pre-assembled and Pre-wired Tower Light

---

Support Tube Mounting

