

# Bảng thông số sản phẩm

Thông số kỹ thuật



Contactor, TeSys Deca, 3P(3 NO), AC-3/AC-3e, <=400V, 50A, 48V AC 50/60Hz coil, screw clamp terminals

LC1D50AE7

## Main

Range	TeSys TeSys Deca
Range of product	TeSys Deca
product or component type	Contactor
Device short name	LC1D
contactor application	Motor control Resistive load
Utilisation category	AC-4 AC-1 AC-3 AC-3e
poles description	3P
[Ue] rated operational voltage	Power circuit: <= 690 V AC 25...400 Hz Power circuit: <= 300 V DC
[Ie] rated operational current	50 A (at <60 °C) at <= 440 V AC AC-3 for power circuit 80 A (at <60 °C) at <= 440 V AC AC-1 for power circuit 50 A (at <60 °C) at <= 440 V AC AC-3e for power circuit
[Uc] control circuit voltage	48 V AC 50/60 Hz

## Complementary

Motor power kW	15 kW at 220...230 V AC 50/60 Hz (AC-3) 22 kW at 380...400 V AC 50/60 Hz (AC-3) 30 kW at 500 V AC 50/60 Hz (AC-3) 33 kW at 660...690 V AC 50/60 Hz (AC-3) 25 kW at 415 V AC 50/60 Hz (AC-3) 30 kW at 440 V AC 50/60 Hz (AC-3) 11 kW at 400 V AC 50/60 Hz (AC-4) 15 kW at 220...230 V AC 50/60 Hz (AC-3e) 22 kW at 380...400 V AC 50/60 Hz (AC-3e) 30 kW at 500 V AC 50/60 Hz (AC-3e) 33 kW at 660...690 V AC 50/60 Hz (AC-3e) 25 kW at 415 V AC 50/60 Hz (AC-3e) 30 kW at 440 V AC 50/60 Hz (AC-3e)
Motor power hp	3 hp at 115 V AC 50/60 Hz for 1 phase motors 7.5 hp at 230/240 V AC 50/60 Hz for 1 phase motors 15 hp at 200/208 V AC 50/60 Hz for 3 phases motors 15 hp at 230/240 V AC 50/60 Hz for 3 phases motors 40 hp at 460/480 V AC 50/60 Hz for 3 phases motors 40 hp at 575/600 V AC 50/60 Hz for 3 phases motors
Compatibility code	LC1D
Pole contact composition	3 NO
Protective cover	With
[Ith] conventional free air thermal current	10 A (at 60 °C) for signalling circuit 80 A (at 60 °C) for power circuit

<b>Irms rated making capacity</b>	140 A AC for signalling circuit conforming to IEC 60947-5-1 250 A DC for signalling circuit conforming to IEC 60947-5-1 900 A at 440 V for power circuit conforming to IEC 60947
<b>Rated breaking capacity</b>	900 A at 440 V for power circuit conforming to IEC 60947
<b>[Icw] rated short-time withstand current</b>	400 A 40 °C - 10 s for power circuit 810 A 40 °C - 1 s for power circuit 84 A 40 °C - 10 min for power circuit 208 A 40 °C - 1 min for power circuit 100 A - 1 s for signalling circuit 120 A - 500 ms for signalling circuit 140 A - 100 ms for signalling circuit
<b>Associated fuse rating</b>	10 A gG for signalling circuit conforming to IEC 60947-5-1 100 A gG at ≤ 690 V coordination type 1 for power circuit 100 A gG at ≤ 690 V coordination type 2 for power circuit
<b>Average impedance</b>	1.5 mOhm - Ith 80 A 50 Hz for power circuit
<b>Power dissipation per pole</b>	3.7 W AC-3 9.6 W AC-1 3.7 W AC-3e
<b>[Ui] rated insulation voltage</b>	Power circuit: 600 V CSA certified Power circuit: 600 V UL certified Signalling circuit: 690 V conforming to IEC 60947-1 Signalling circuit: 600 V CSA certified Signalling circuit: 600 V UL certified Power circuit: 690 V conforming to IEC 60947-4-1
<b>Overvoltage category</b>	III
<b>Pollution degree</b>	3
<b>[Uimp] rated impulse withstand voltage</b>	6 kV conforming to IEC 60947
<b>Safety reliability level</b>	B10d = 1369863 cycles contactor with nominal load conforming to EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load conforming to EN/ISO 13849-1
<b>Mechanical durability</b>	6 Mcycles
<b>Electrical durability</b>	1.45 Mcycles 50 A AC-3 at Ue ≤ 440 V 1.1 Mcycles 80 A AC-1 at Ue ≤ 440 V 1.45 Mcycles 50 A AC-3e at Ue ≤ 440 V
<b>Control circuit type</b>	AC at 50/60 Hz standard
<b>Coil technology</b>	Without built-in suppressor module
<b>Control circuit voltage limits</b>	0.3...0.6 Uc (-40...70 °C):drop-out AC 50/60 Hz 0.8...1.1 Uc (-40...60 °C):operational AC 50 Hz 0.85...1.1 Uc (-40...60 °C):operational AC 60 Hz 1...1.1 Uc (60...70 °C):operational AC 50/60 Hz
<b>Inrush power in VA</b>	140 VA 60 Hz cos phi 0.75 (at 20 °C) 160 VA 50 Hz cos phi 0.75 (at 20 °C)
<b>Hold-in power consumption in VA</b>	13 VA 60 Hz cos phi 0.3 (at 20 °C) 15 VA 50 Hz cos phi 0.3 (at 20 °C)
<b>Heat dissipation</b>	4...5 W at 50/60 Hz
<b>Operating time</b>	4...19 ms opening 12...26 ms closing
<b>Maximum operating rate</b>	3600 cyc/h 60 °C

<b>Connections - terminals</b>	Control circuit: screw clamp terminals 2 1...2.5 mm <sup>2</sup> - cable stiffness: flexible with cable end
	Control circuit: screw clamp terminals 1 1...4 mm <sup>2</sup> - cable stiffness: flexible without cable end
	Control circuit: screw clamp terminals 2 1...4 mm <sup>2</sup> - cable stiffness: flexible without cable end
	Control circuit: screw clamp terminals 1 1...4 mm <sup>2</sup> - cable stiffness: flexible with cable end
	Control circuit: screw clamp terminals 1 1...4 mm <sup>2</sup> - cable stiffness: solid without cable end
	Control circuit: screw clamp terminals 2 1...4 mm <sup>2</sup> - cable stiffness: solid without cable end
	Power circuit: screw connection 1 1...35 mm <sup>2</sup> - cable stiffness: flexible without cable end
	Power circuit: screw connection 2 1...25 mm <sup>2</sup> - cable stiffness: flexible without cable end
	Power circuit: screw connection 1 1...35 mm <sup>2</sup> - cable stiffness: flexible with cable end
	Power circuit: screw connection 2 1...25 mm <sup>2</sup> - cable stiffness: flexible with cable end
	Power circuit: screw connection 1 1...35 mm <sup>2</sup> - cable stiffness: solid without cable end
	Power circuit: screw connection 2 1...25 mm <sup>2</sup> - cable stiffness: solid without cable end

<b>Tightening torque</b>	Control circuit: 1.7 N.m - on EverLink BTR screw connectors - with screwdriver flat Ø 6 mm
	Control circuit: 1.7 N.m - on EverLink BTR screw connectors - with screwdriver Philips No 2
	Power circuit: 8 N.m - on EverLink BTR screw connectors - cable 25...35 mm <sup>2</sup> hexagonal screw head 4 mm
	Power circuit: 5 N.m - on EverLink BTR screw connectors - cable 1...25 mm <sup>2</sup> hexagonal screw head 4 mm
	Control circuit: 1.7 N.m - on EverLink BTR screw connectors - with screwdriver pozidriv No 2
	Power circuit: 2.5 N.m - on EverLink BTR screw connectors - with screwdriver pozidriv No 2

<b>Auxiliary contact composition</b>	1 NO + 1 NC
<b>Auxiliary contacts type</b>	type mechanically linked 1 NO + 1 NC conforming to IEC 60947-5-1 type mirror contact 1 NC conforming to IEC 60947-4-1
<b>Signalling circuit frequency</b>	25...400 Hz
<b>Minimum switching voltage</b>	17 V for signalling circuit
<b>Minimum switching current</b>	5 mA for signalling circuit
<b>Insulation resistance</b>	> 10 MOhm for signalling circuit
<b>Non-overlap time</b>	1.5 ms on de-energisation between NC and NO contact 1.5 ms on energisation between NC and NO contact
<b>mounting support</b>	Plate Rail

## Environment

<b>Standards</b>	CSA C22.2 No 14 EN 60947-4-1 EN 60947-5-1 IEC 60947-4-1 IEC 60947-5-1 UL 508 IEC 60335-1
<b>Product certifications</b>	RINA CCC BV GL UL LROS (Lloyds register of shipping) CSA DNV GOST
<b>IP degree of protection</b>	IP20 front face conforming to IEC 60529
<b>Protective treatment</b>	TH conforming to IEC 60068-2-30

<b>Climatic withstand</b>	conforming to IACS E10 exposure to damp heat conforming to IEC 60947-1 Annex Q category D exposure to damp heat
<b>Permissible ambient air temperature around the device</b>	-40...60 °C 60...70 °C with derating
<b>Operating altitude</b>	0...3000 m
<b>Fire resistance</b>	850 °C conforming to IEC 60695-2-1
<b>Flame retardance</b>	V1 conforming to UL 94
<b>Mechanical robustness</b>	Vibrations contactor open (2 Gn, 5...300 Hz) Vibrations contactor closed (4 Gn, 5...300 Hz) Shocks contactor closed (15 Gn for 11 ms) Shocks contactor open (10 Gn for 11 ms)
<b>Height</b>	122 mm
<b>Width</b>	55 mm
<b>Depth</b>	120 mm
<b>net weight</b>	0.855 kg

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	6.2 cm
<b>Package 1 Width</b>	13.5 cm
<b>Package 1 Length</b>	15.5 cm
<b>Package 1 Weight</b>	924.0 g
<b>Unit Type of Package 2</b>	S02
<b>Number of Units in Package 2</b>	10
<b>Package 2 Height</b>	15.0 cm
<b>Package 2 Width</b>	30.0 cm
<b>Package 2 Length</b>	40.0 cm
<b>Package 2 Weight</b>	9.973 kg
<b>Unit Type of Package 3</b>	P06
<b>Number of Units in Package 3</b>	160
<b>Package 3 Height</b>	77.0 cm
<b>Package 3 Width</b>	80.0 cm
<b>Package 3 Length</b>	60.0 cm
<b>Package 3 Weight</b>	168.068 kg

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------

## Bền vững

Nhãn **Green Premium™** là cam kết của Schneider Electric trong việc cung cấp sản phẩm với hiệu suất môi trường tốt nhất. Green Premium cam kết tuân thủ các quy định mới nhất, minh bạch về tác động môi trường, cũng như các sản phẩm tuần hoàn và CO<sub>2</sub> thấp.

**Hướng dẫn đánh giá tính bền vững của sản phẩm** là tài liệu kỹ thuật phổ thông giúp làm rõ các tiêu chuẩn nhân sinh thái toàn cầu và cách diễn giải việc khai báo môi trường.

[Tìm hiểu thêm về Green Premium >](#)

[Hướng dẫn đánh giá về sự bền vững của sản phẩm >](#)



Minh bạch [RoHS/REACH](#)

## Hiệu suất sức khỏe

Reach Free Of Svhc

Toxic Heavy Metal Free

Mercury Free

Rohs Exemption Information [Yes](#)

Pvc Free

## Chứng nhận & Tiêu chuẩn

**Reach Regulation**

[REACH Declaration](#)

**Eu Rohs Directive**

Compliant

[EU RoHS Declaration](#)

**China Rohs Regulation**

[China RoHS declaration](#)

Pro-active China RoHS declaration (out of China RoHS legal scope)

**Environmental Disclosure**

[Product Environmental Profile](#)

**Weee**


The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

**Circularity Profile**

[End of Life Information](#)

## Dimensions Drawings

### Dimensions

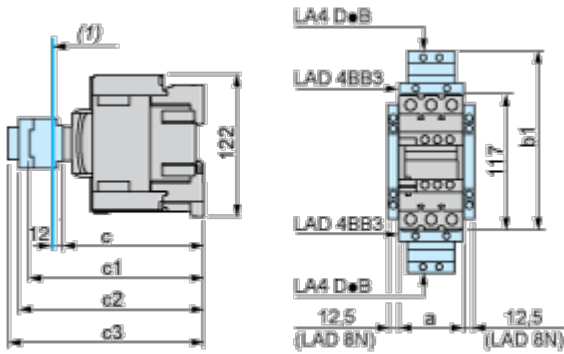

(1) Minimum electrical clearance

LC1		D40A...D65A
a		55
b1	with LA4 D•2	–
	with LA4 DB3 or LAD 4BB3	136
	with LA4 DF, DT	157
	with LA4 DM, DW, DL	166
c	without cover or add-on blocks	118
	with cover, without add-on blocks	120
c1	with LAD N (1 contact)	–
	with LAD N or C (2 or 4 contacts)	150
c2	with LA6 DK10, LAD 6DK	163
c3	with LAD T, R, S	171
	with LAD T, R, S and sealing cover	175

## Connections and Schema

### Wiring

---

